

MW

SPEEDSWAP™

FEATURES / / / / /

- ✦ *Hard Coat Anodized for Durability*
- ✦ *XLF Coating for Reduced Friction*
- ✦ *Compatible with Lightning Rail*
- ✦ *Bolt in Side Magnets*
- ✦ *Numbered Rows and Columns*

FIXTURE & POSITIONING SPEEDSWAP™ PLATES


Americas, Asia-Pacific
sales@metrologyworks.com
Phone: 816-650-2266

Europe
sales.eu@metrologyworks.com
Phone: +49 162/1826504


*SpeedSwap Fixture Plates**

Product Code	Construction	Size	Thread
SS-6-6-x5-1x25-20	Aluminum	6" x 6"	1/4-20
SS-12-12-x5-1x25-20	Aluminum	12" x 12"	1/4-20
SS-18-18-x5-1x25-20	Aluminum	18" x 18"	1/4-20
SS-150-150-12x5MM-M6	Aluminum	150mm x 150mm	M6
SS-150-150-15MM-M8	Aluminum	150mm x 150mm	M8
SS-300-300-12x5MM-M6	Aluminum	300mm x 300mm	M6
SS-300-300-15MM-M8	Aluminum	300mm x 300mm	M8
SS-450-450-12x5MM-M6	Aluminum	450mm x 450mm	M6
SS-450-450-15MM-M8	Aluminum	450mm x 450mm	M8

***ALL SpeedSwap fixtures are compatible with Lightning Rail.**

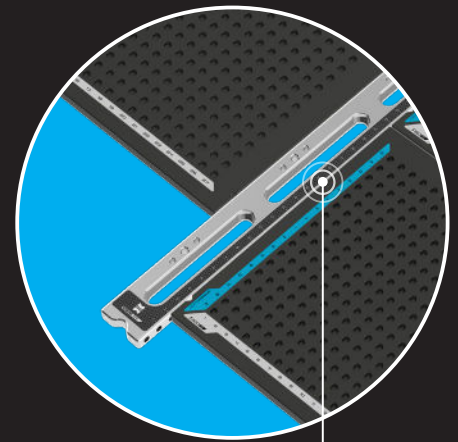

Lightning Rail Compatible

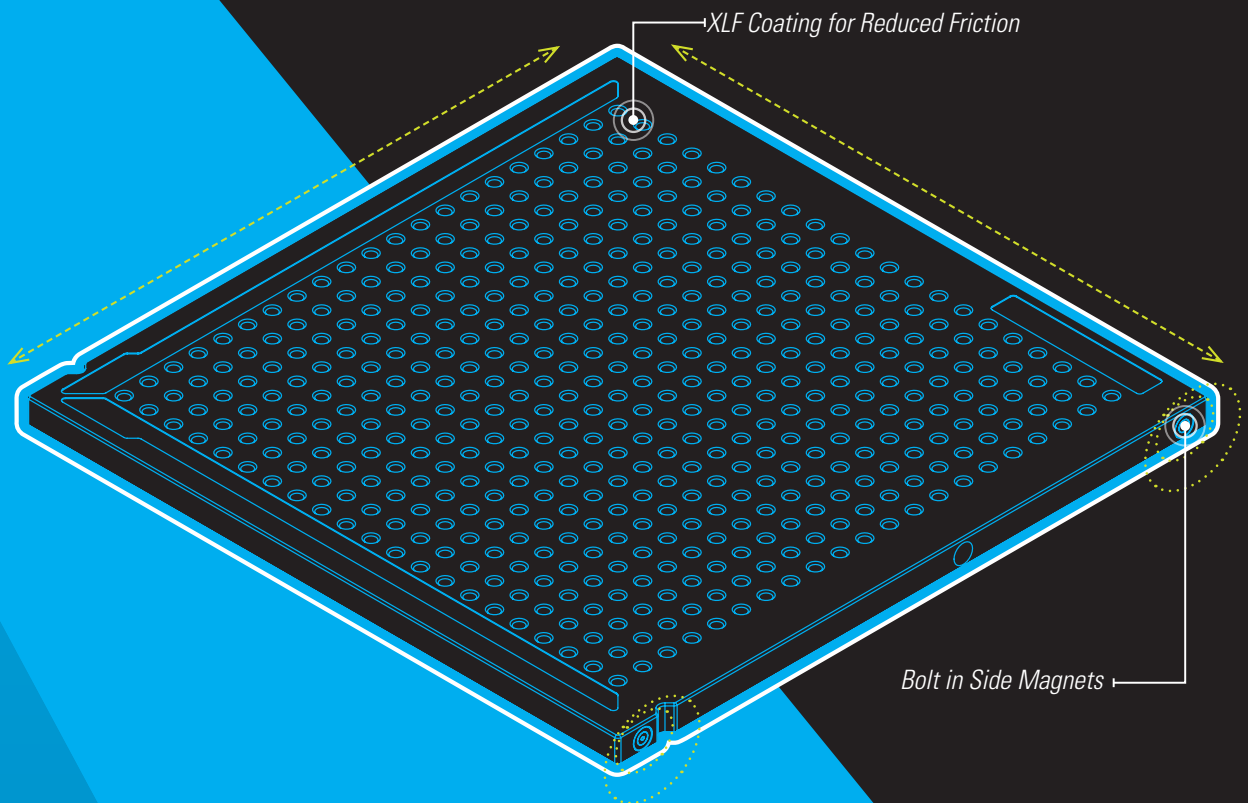

SPEEDSWAP™ PLATES

www.MetrologyWorks.com

MetrologyWorks, Inc.
105 S.E. Magellan Dr.
Blue Springs, MO 64014

MetrologyWorks GmbH
AM Stichkanal
14167 Berlin, Germany